

## 39 1/2" Reach-In Freezer All Stainless Steel

### Model: PLM-35FS



- Tested to NSF Standard 7 requirements for open food storage.
- Interior cabinet is full stainless steel, floor with coved corners.
- Exterior cabinet construction consists of full stainless steel front and sides.
- Bottom mounted compressor for more efficient operation in coolest area of kitchen.
- Electronic thermostat with external digital LED display for accurate control and easy reading.
- Larger fan motors and blades for more efficient air flow ensuring faster recovery times.
- Efficient condensate hot gas loop built into condensate pan for energy saving evaporation of excess condensate water.
- Environmentally friendly R290 Hydrocarbon gas.
- 6 adjustable, heavy-duty epoxy coated wire shelves.
- Freezer door frame has integral factory installed heating element to eliminate condensation.
- Self closing doors that remain open at 90 degrees.
- Magnetic door gasket is removable and replaceable without tools.
- Lockable door with foamed-in-place recessed handle.
- Front accessible, bottom mounted condensing unit is mounted on slide out rack for easy maintenance.
- Easy to mount plate casters (2 lockable) are standard with all units.

Toll Free: +1 (800) 373-8699  
polarman@chefmindgroup.com  
Address: 1189S Jellick Ave,  
City of Industry, CA 91748




## 39 1/2" Reach-In Freezer All Stainless Steel

### Model: PLM-35FS

•Certified to ANSI/NSF Standard 7



MODEL	EXTERNAL DIMENSION (inches)	V/Hz/Ph	STORAGE CAPACITY Cu-ft	SHELF CAPACITY Sq-ft	TEMPERATURE	REFRIGERANT	AMPS	CORD LENGTH	NEMA PLUG	SHIPPING WEIGHT (lbs.)
PLM-35FS	39 1/2x32 11/16x82 5/16	115V/60Hz/1	35	20.1	-10°F	R290	8	8'	5-15P	419

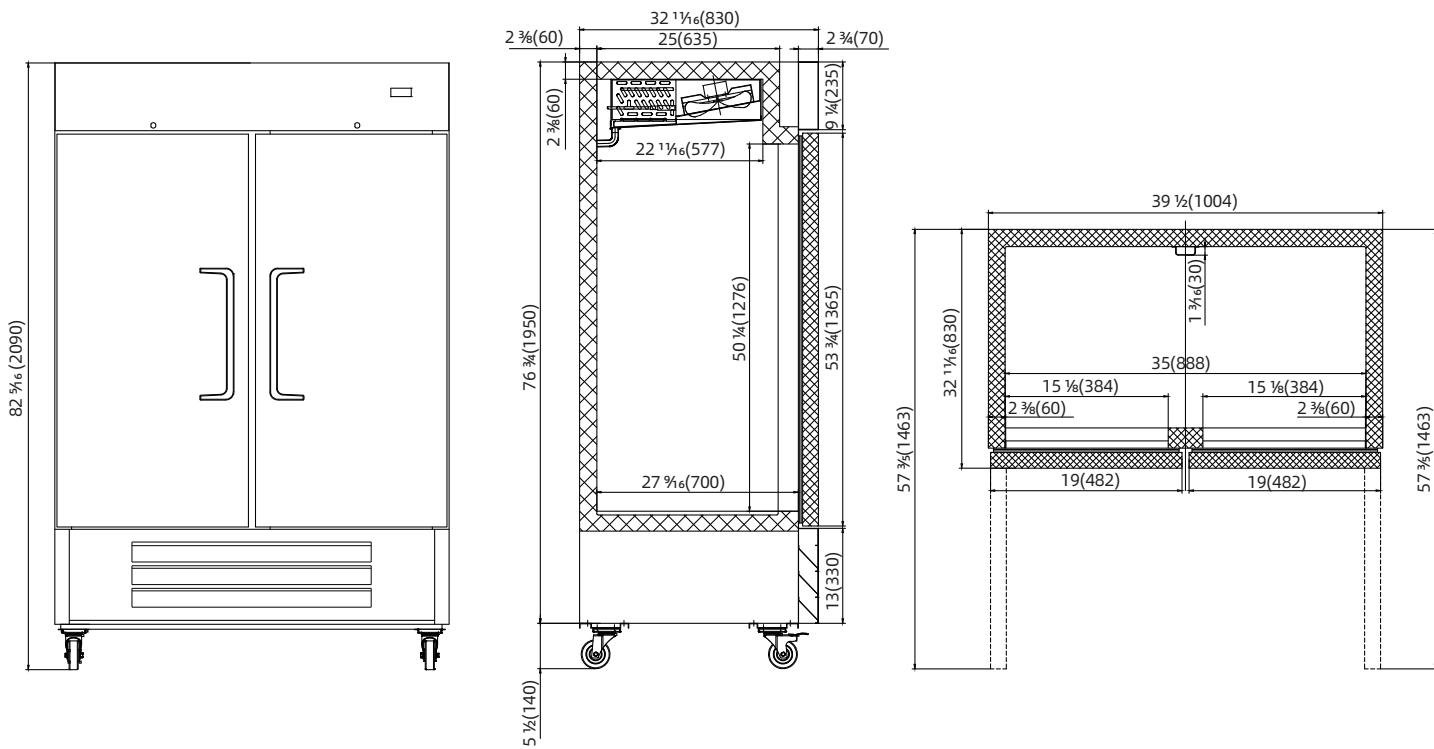

2 YEAR PARTS WARRANTY  
5 YEAR COMPRESSOR WARRANTY

**CHEFMIND GROUP INC.**  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Intertek



Intertek