

53 15/16" Reach-In Freezer All Stainless Steel

Model: PLM-54FS



- Tested to NSF Standard 7 requirements for open food storage.
- Interior cabinet is full stainless steel, floor with coved corners.
- Exterior cabinet construction consists of full stainless steel front and sides.
- Bottom mounted compressor for more efficient operation in coolest area of kitchen.
- Electronic thermostat with external digital LED display for accurate control and easy reading.
- Larger fan motors and blades for more efficient air flow ensuring faster recovery times.
- Efficient condensate hot gas loop built into condensate pan for energy saving evaporation of excess condensate water.
- Environmentally friendly R290 Hydrocarbon gas.
- 6 adjustable, heavy-duty epoxy coated wire shelves.
- Freezer door frame has integral factory installed heating element to eliminate condensation.
- Self closing doors that remain open at 90 degrees.
- Magnetic door gasket is removable and replaceable without tools.
- Lockable door with foamed-in-place recessed handle.
- Front accessible, bottom mounted condensing unit is mounted on slide out rack for easy maintenance.
- Easy to mount plate casters (2 lockable) are standard with all units.

Toll Free: +1 (800) 373-8699
polarman@chefmindgroup.com
Address: 1189S Jellick Ave,
City of Industry, CA 91748




53 15/16" Reach-In Freezer All Stainless Steel

Model: PLM-54FS



•ETL Certified to ANSI/NSF Standard 7

MODEL	EXTERNAL DIMENSION (inches)	V/Hz/Ph	STORAGE CAPACITY Cu.Ft.	DOORS	TEMPERATURE	REFRIGERANT	AMPS	CORD LENGTH	NEMA PLUG	SHIPPING WEIGHT (lbs.)
PLM-54FS	53 1⁄16 X 32 1⁄16 X 82 5⁄16	115/60/1	49	2	-10°F to 10°F	R290	9	8'	5-15P	501

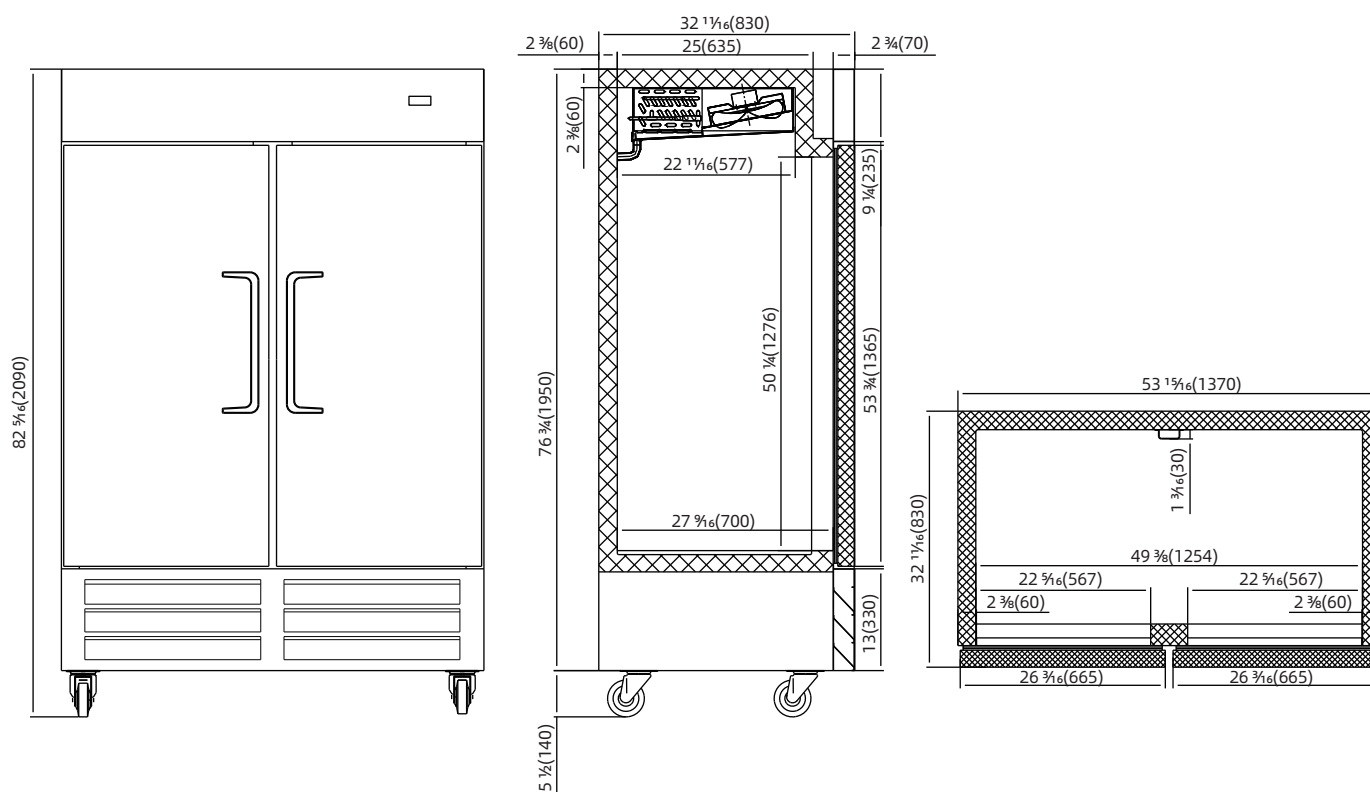

2 YEAR PARTS WARRANTY
5 YEAR COMPRESSOR WARRANTY (NOT FOR RESIDENTIAL USE)

**CHEFMIND GROUP INC.**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE